

EXCLUSIVE

SPIDER LIFTS AT A HIGHER LEVEL FOR 40 YEARS

FS 290 / FS 320






The ultimate compact platform.

The Falcon Spider Atrium Lift is an original Falcon Spider Lift with market leading features. The Falcon Spider Atrium Lift FS 290/320 was invented at first in the 1970's, and developed ever since. The Falcon Spider Atrium Lift FS 290/320 is very applicable in matters of:

- Facility management
- Atrium access
- Narrow access
- Best quality & safety
- Double jib system
- Easy transport & propelling
- Low weight & ground pressure
- Need for flexible outrigger
- Limited setup space
- Power Bi-energy Hybrid

The Falcon Spider Atrium Lift is capable of passing through a door opening a mere 0,8 m wide and 1,98 m high. Further details on the Falcon Spider Atrium Lift FS 290/320 is mentioned on the following pages.


FS 290






Working height and reach To the outermost points.

FS 320





Working height and reach To the outermost points.

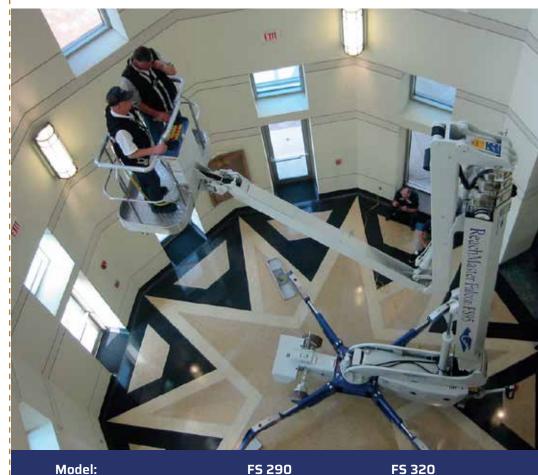

Model: FS 290

Working height: 29 m 32 m Maximum reach: 14-15 m 14-15 m Double jib (2 x 3 m): 6 m 6 m Doublejib rotation 200° 200° Basket load: 200 kg 200 kg Aluminium basket: $(0.8 \times 1.4 \text{ m})$ $(0.8 \times 1.4 \text{ m})$ Basket rotation (option): +/-90° +/-90° 375° 375° Turret rotation:

Dimensions (transport position)

Total height:	1,98 m	1,98 m
Total length:	6,30 m	7,20 m
Total width:	0,8 - 0,9 m*	0,8 - 0,9 m*
Gradability (standard):	5° / 10%	5° / 10%
Weight approx.:	3.750 kg*	4.150 kg*

*Depending on optional equipment





FALCON LIFTS A/S

Tolderlundsvej 106 DK-5000 Odense C Tel: +45 66 13 11 00

falcon@falconlifts.com falconlifts.com

STANDARD EQUIPMENT:

- Automatic stability & outreach control
- Computer controlled (can-bus)
- Proportional control of all functions
- Self-propelled
- Battery powered with charger (180 Ah)
- Double jib
- 375 ° turret rotation, with integrated stop
- Individual setting of each outrigger
- Electronic checking of the power system (PLC)
- Manual pump system for emergency lowering
- Ability to self-load onto trucks or trailers
- Non marking solid tyres
- Adjustable wheel-axle
- Minimum width only 0.8 m
- Space for tools etc. in basket
- Storage room with lock in chassis
- Wireless remote control of all functions
- Falcon Service Tool (Remote access via laptop)

OPTIONS:

- +/- 90 ° basket rotation
- 220V AC power supply in the basket
- Air/water supply in the basket
- Sensor system on basket
- Diesel engine, Hatz "Silent pack"
- Petrol generator, Honda
- 220V AC direct powered electro motor
- Extra batteries
- Autosetting/levelling
- Cover
- Special outrigger footplates
- Basket in various sizes
- Slope alarm
- 2 wheel drive (10 °/18 % climb)
- 3 wheel drive (15 °/26 % climb)(width 0,95 m)
- Twin wheels on rear axle
- Special colour
- Height control switch
- Anti entrapment device
- GSM module for remote access and monitoring